

3600SERIES



HEAVIER OPERATING WEIGHT

Weighing in at 4,367 to 5,447 lbs (depending on model), the 3600 series has the heaviest operating weight in its class, ensuring supreme safety, stability, and power.



REAR WORK LIGHTS

All 3600 series tractors come standard with bright, high-intensity rear work lights. Whether it's day or night, you'll see what's going on behind you.




STANDARD 4-WHEEL DRIVE

A tractor built for any terrain. Standard 4-wheel drive allows for powerful performance in the roughest environments.

3600 SERIES ATTACHMENTS

| TRACTOR | 3640 HST | 3640 HST CAB | 3640 PST | 3640 PST CAB | 3650 HST | 3650 HST CAB | 3650 PST | 3650 PST CAB |
|---|--|----------------|---------------|----------------|---------------|----------------|---------------|----------------|
| LOADER MODEL | 3650 L | 3650 CL | 3650 L | 3650 CL | 3650 L | 3650 CL | 3650 L | 3650 CL |
| Standard Bucket Size [in] | | | | | 75 | | | |
| Maximum Lift Height [in] | | | | | 111.5 | | | |
| Dig Depth [in] | | | | | 4.5 | | | |
| Lift Capacity to Full Height at Pivot Pin [lbs] | | | | | 2700 | | | |
| Breakout Force [lbs] | | | | | 5100 | | | |
| Shipping Weight [lbs] | | | | | 1450 | | | |
| BACKHOE MODEL | 65B (not compatible with 2nd spool) | | | | | | | |
| Standard Bucket Size [in] | 18 | | | | | | | |
| Maximum Dig Depth [in] | 112 | | | | | | | |
| Dig Depth 2' Flat Bottom [in] | 110 | | | | | | | |
| Dig Force Bucket [lbs] | 3895 | | | | | | | |
| Dig Force Dipper [lbs] | 2358 | | | | | | | |
| Shipping Weight [lbs] | 1100 | | | | | | | |

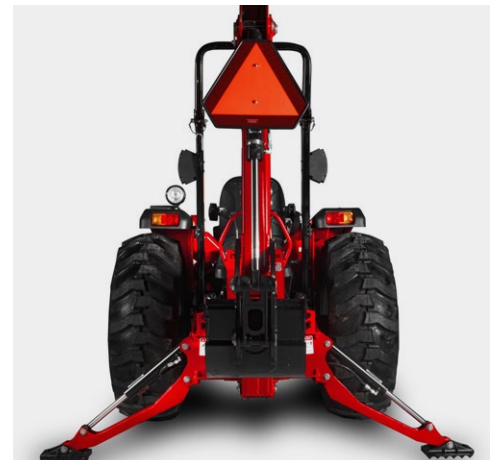

3600 SERIES SPECIFICATIONS

| TRACTOR | 3640 HST | 3640 HST CAB | 3640 PST | 3640 PST CAB | 3650 HST | 3650 HST CAB | 3650 PST | 3650 PST CAB |
|-------------------------------------|--|--------------|-----------------------------------|--------------|-------------------------------|--------------|-----------------------------------|--------------|
| ENGINE | | | | | | | | |
| Type | Four-stroke, Naturally Aspirated, Direct Injection, Water Cooled Diesel Engine | | | | | | | |
| Engine HP (kW) @ RPM | 40 (29.9) @ 2800 | | | | 49 (36.5) @ 2800 | | | |
| Displacement [in ³ (cc)] | 166.7 (2732) | | | | | | | |
| Number of Cylinders | 4 | | | | | | | |
| Fuel Tank [gal (L)] | 11.3 (42.8) | 14.5 (54.9) | 11.3 (42.8) | 14.5 (54.9) | 11.3 (42.8) | 14.5 (54.9) | 11.3 (42.8) | 14.5 (54.9) |
| DRIVE TRAIN | | | | | | | | |
| Transmission | HST - 3 Ranges | | Power Shuttle w/ Full Synchronesh | | HST - 3 Ranges | | Power Shuttle w/ Full Synchronesh | |
| Number of Speeds | Infinite | | 12F / 12R | | Infinite | | 12F / 12R | |
| Clutch | Wet | | | | | | | |
| Brakes | Oil Immersed Wet Disc Brakes | | | | | | | |
| PTO | | | | | | | | |
| Type | Independent | | | | | | | |
| Rear PTO RPM | 540 @ 2405 | | | | | | | |
| Mid PTO RPM | N/A | | | | | | | |
| PTO HP (kW) | 30.5 (22.7) | | 31 (23.1) | | 40.5 (30.2) | 39.5 (29.4) | | 40 (29.8) |
| HYDRAULICS | | | | | | | | |
| Type | Open Center | | | | | | | |
| Implement Pump Output [gpm (L/min)] | 11 (41.6) | | | | | | | |
| Maximum Total Flow [gpm (L/min)] | 16 (60.6) | | | | | | | |
| Standard Rear Valve | 1 Spool | | | | | | | |
| 3-Point Hitch | CAT I & II w/ Telescoping Stabilizers & Flex Links | | | | | | | |
| Lift Capacity [lb (kg)] | 3090 (1401) | | | | | | | |
| ELECTRICAL | | | | | | | | |
| Battery | 12 V, 925 CCA | | | | | | | |
| Alternator | 12 V, 45 A | 12 V, 90 A | 12 V, 45 A | 12 V, 90 A | 12 V, 45 A | 12 V, 90 A | 12 V, 45 A | 12 V, 90 A |
| DIMENSIONS | | | | | | | | |
| Overall Length [in (mm)] | 129 (3276) | | | | | | | |
| Overall Width [in (mm)] | 73.7 (1871) | | 74 (1880) | 75.4 (1915) | 75.5 (1917) | 75.4 (1915) | 74 (1880) | |
| Overall Height [in (mm)] | 98.7 (2506) | 100 (2540) | 98.1 (2491) | 100.5 (2553) | 99.2 (2519) | 101 (2565) | 99.2 (2519) | 100.5 (2553) |
| Wheelbase [in (mm)] | 75 (1905) | | | | | | | |
| Minimum Ground Clearance [in (mm)] | 13.6 (345) | | | | | | | |
| Turning Radius [ft (m)] | 10.3 (3.1) | | | | | | | |
| Weight [lb (kg)] | 4367 (1980) | 5247 (2380) | 4367 (1980) | 5247 (2380) | 4620 (2095) | 5447 (2471) | 4620 (2095) | 5447 (2471) |
| WHEELS & TIRES | | | | | | | | |
| AG [Front/Rear] | 9.5-16 / 14.9-24 | | | | 9.5-20 / 16.9-24 | | 9.5-16 / 14.9-24 | |
| IND [Front/Rear] | 12 x 16.5 / 16.9 x 24 | | | | 14 x 17.5 / 19.5L x 24 | | | |
| TURF [Front/Rear] | 29 x 12.5 -15 / 44 x 18 - 20 | | | | 31 x 13.5 - 15 / 21.5L - 16.1 | | | |